




# BP210B\*\*1 Series Ceiling Fans

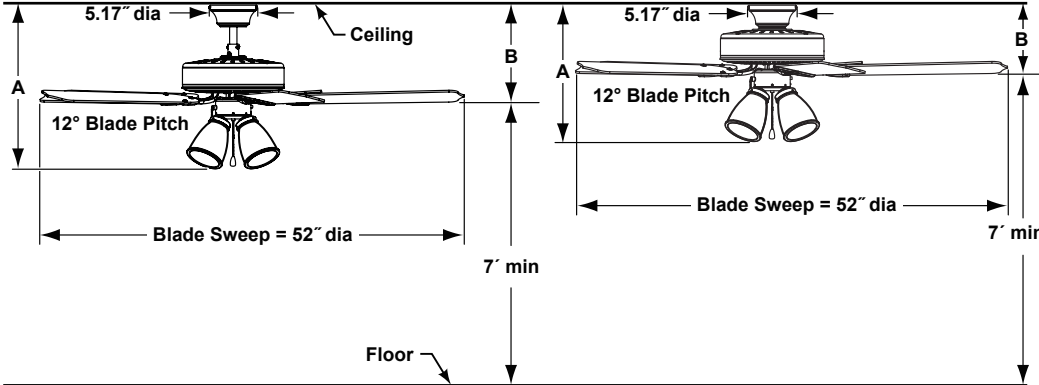

Net Hanging Weight: 19.10 lbs

	A	B
Fan In Close to Ceiling Configuration	15.06"	7.74"
	A	B
Fan w/4.5" downrod	18.70"	11.10"
Fan w/12" downrod	26.20"	18.60"
Fan w/18" downrod	32.20"	24.60"
Fan w/24" downrod	38.20"	30.60"
Fan w/36" downrod	50.20"	42.60"
Fan w/48" downrod	62.20"	54.60"
Fan w/60" downrod	74.20"	66.60"
Fan w/72" downrod	86.20"	78.60"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 21" traditional wood blades is included.

### CONTROL OPTIONS:

Three fan speeds pull chain control included. The reverse switch is located on the switch housing. Optional WC2WH and WR501WH wall controls, CR500 remote controls with receiver unit and WFR50 receiver unit are available —sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Four 4-watt E12 LED bulbs included.

### DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

### LOCATION USE:

Fans are rated for dry locations only.

Available Finishes	
Fan Assembly / Glass	Blades - Traditional
MW – Matte white / Frosted white	Matte white
OB – Oil-rubbed bronze / Amber	Cherry / walnut reversible
SN – Satin nickel / Frosted white	Cherry / walnut reversible
BL – Black / Frosted white	Black / walnut reversible

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	5897	92	0.53	64
Med	124	3701	126	0.37	29
Low	65	1744	171	0.21	10

Energy Guide FTC (Hugger)			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2700	8	89

Energy Guide FTC (Standard)			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2989	8	99

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	4	4	1200	2700	90%